

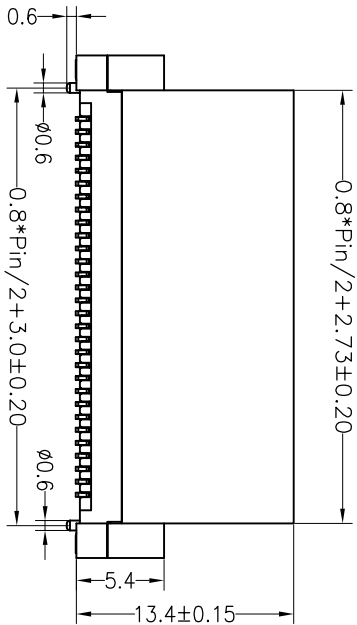
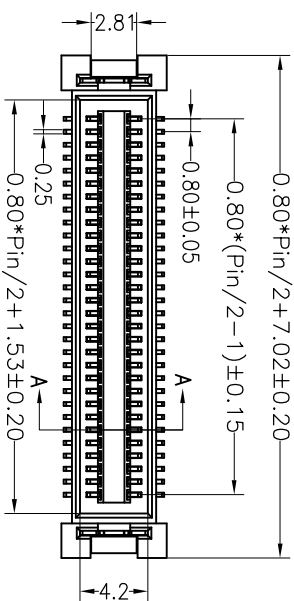


**SPECIFICATIONS**  
**PERFORMANCE**

Electical Rating: AC/DC 50V 0.8A  
 Contact Resistance: 30mΩ Max  
 Insulation Resistance: 500MΩ Min  
 Withstang Volt: 500V AC/minute  
 Oprating Temperature: -40°C to +105°C

**Material**

Contact: Phosphor Bronze Gold-Plated  
 Locating Plate: Brass Sn Over Ni  
 Housing: LCP UL94V0  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

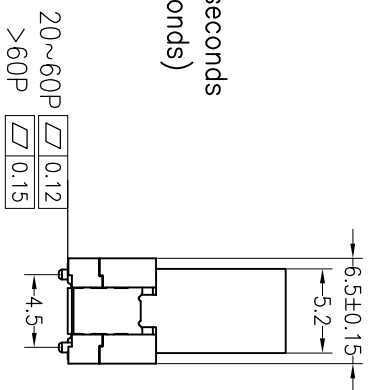


**Ordering Information**

**3725 M XXX 134 XX F X 01**

F=Female  
 M=Male  
 No. of pins 20P~100P  
 Plastic Height 134=13.4mm  
 Contact Plating G0:Gold Flash  
 G1:3U" Gold  
 G2:5U" Gold  
 G3:10U" Gold  
 G4:15U" Gold  
 S0:1.5U" Gold/Tin  
 S1:3U" Gold/Tin

Insulator Material Option  
 D=BK-PA46  
 E=BK-PA9T  
 F=BK-LCP

Packing T:Tube  
 R:Reel

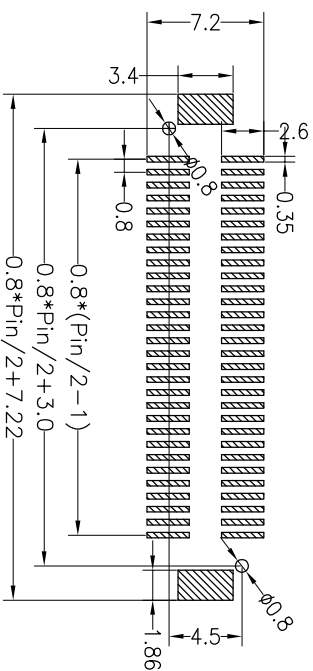

P.C.B Layout

OPERATION		DRAW		SCALE		FIT	
				UNIT	mm		
X.X	±0.30	yyusheng	19.10.16				
X.XX	±0.20	CHECK		SIZE	A4		
X:XXX	±0.10	APPROVE		SHEET	1/1		
Angle	±3°			PROJ.			
DIM	TOL						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.10.16	NEW DRAWING	
1			

**JILIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

PART NO. 3725MXXX134XXFX01

TITLE: 0.80mm 异形式TB NPin H13.4 Male