

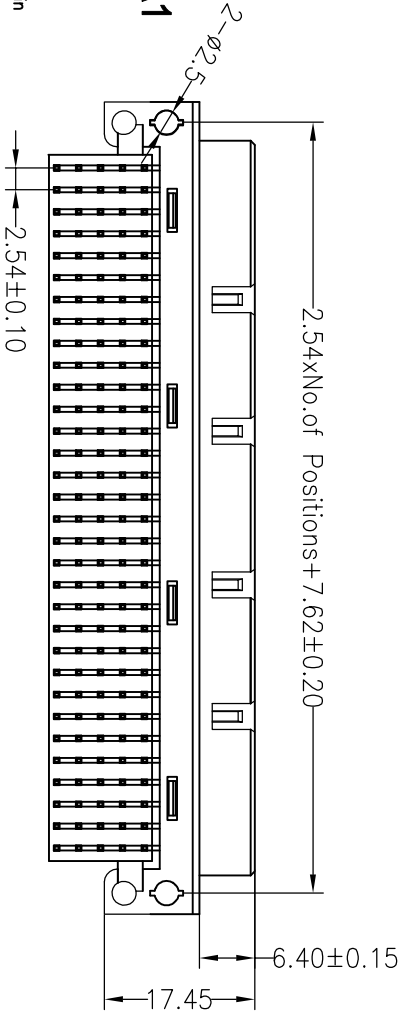


SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(U94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

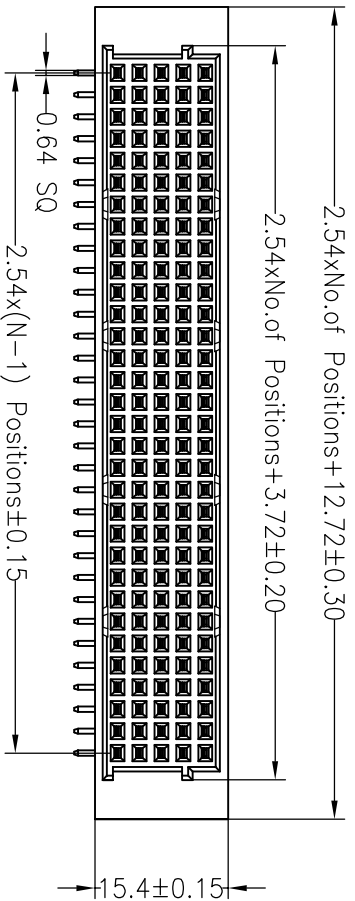

Ordering Information

3511 5 160 A F R XX B NA1

No. of Pins: 5x32P
 Contact Type: F=Female
 Contact Plating:
 G0: Gold Flash
 S0: Gold Flash/Tin
 S1: 2U" Gold/Tin
 S2: 5U" Gold/Tin
 S3: 10U" Gold/Tin
 S4: 15U" Gold/Tin
 S5: 30U" Gold/Tin
 SN: Tin

OPERATION		DRAW	YUSheng	14.09.16
X.X	±0.30	CHECK		
X.XX	±0.20			
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JIN®

深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

PART NO.

35115160ARFXBNA1

TITLE:

DIN 41612 90° 5x32Pin Female

REV	DATE	MODIFICATION DESCRIPTION
A0	2014.09.16	NEW DRAWING

1	2	3	4	5	6	7	8	9
			CHANGE					