





SPECIFICATIONS

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)



Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

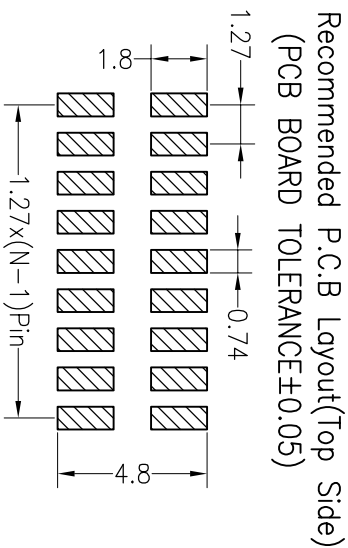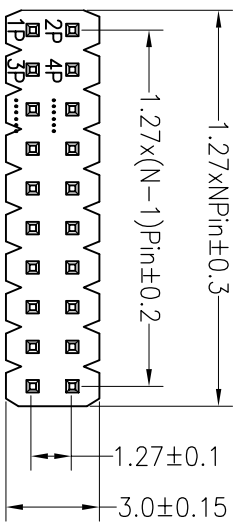

Ordering Information

1425 12 XX X N XX Z XXX X 01

No. of Pins Per Row: 2*50
 Insulator Material Option:
 A=BK-PBT, C=BK-PA6T, D=BK-PA46, E=BK-PA9T, F=BK-LCP
 Contact Plating Option:
 G1: Gold Flash, G2: 1.5U" Gold, G3: 2U" Gold, G4: 3U" Gold, G5: 5U" Gold
 Pin Length: SM: Tm
 Packing Option:
 O=PE Bag, A=Tray, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+My/or

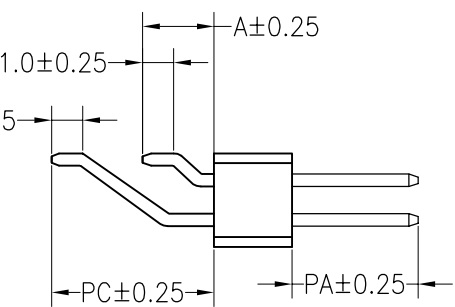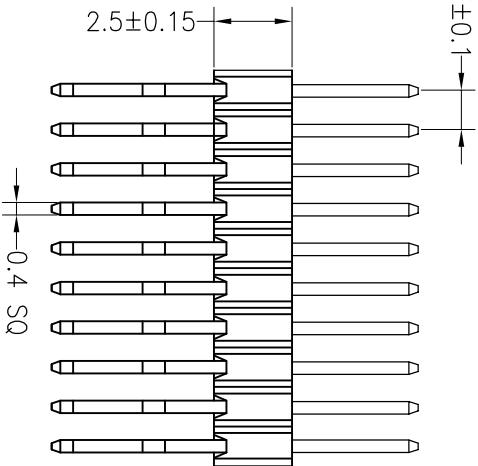

Dimension antitheses list

ITEM	PA	A	PC	L短	L长
Standard	4.00	2.30	5.50	9.00	13.00

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD

Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

PART NO. 142512XXXXXXZXXXX01

TITLE: 1.27PH 2xnPin H2.5 90° SMT

OPERATION		SCALE	FIT	PROJ.	
DRAW	BEN	UNIT	mm	1/1	1/1
±0.30	12.04.19	A4	mm	1/1	1/1
X.XX		CHECK			
X.XX		CHECK			
X.XXX		CHECK			
±0.10		CHECK			
±3°		CHECK			
±0.10		CHECK			
±3°		CHECK			
±0.10		CHECK			
±3°		CHECK			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.19	NEW DRAWING	
1			