





SPECIFICATIONS

Rated Current: 1.5AMP
Contact Resistance: 30mΩ Max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: Polyester (UL94V-0)
Standard: LCP
Max. Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

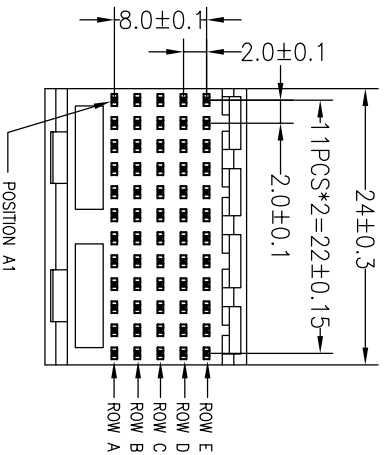


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

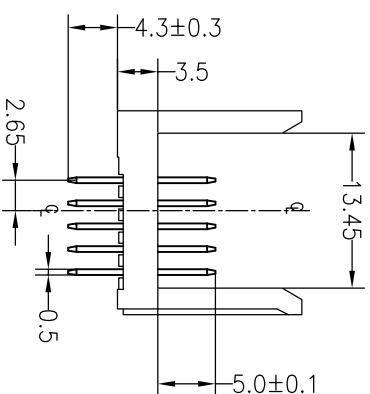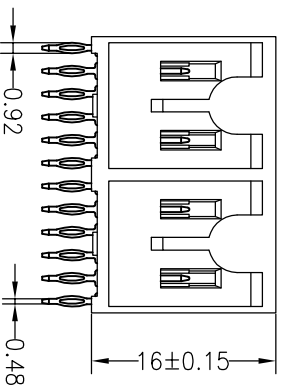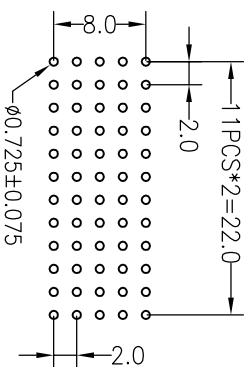

Ordering Information

35105 60 A M S XX PN X 1

No. of Pins: 5x12P
Contact Type: F:Female, M:Male
Contact Plating: G0:Gold Flash, S0:Gold Flash/Tin, S1:21U" Gold/Tin, S2:50U" Gold/Tin, S3:10U" Gold/Tin, S4:15U" Gold/Tin, S5:30U" Gold/Tin, SN:Tin
Packing: A:Tray, T:Tube



OPERATION		DRAW		SCALE		FIT		TITLE:	
X.X	±0.30	Y.YuSheng	19.10.10	UNIT	mm	A4	1/1	PART NO. 3510560AMSXXPNX1	
X.XX	±0.20	CHECK		SIZE	A4			FUTURE BUS,5*12 Male 180°,PRESS-FIT	
X.XXX	±0.10			SHEET	1/1				
ANGLE	±3°	APPROVE		PROL.					
DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL					
2019.10.10	NEW DRAWING								
REV									
1									

JILIN 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892