

备注一:

UL 标准

1. 额定电压与电流 : 300V / 12A
2. 工频耐压 : AC1600V/1Min.
3. 接触电阻: 30mΩ Max
4. 线径范围 : 26~12AWG

备注二:




1. 尺寸标注符合标准 ASME Y14.5-2009
2. P距 : 5.08mm, P数范围 : N=02~24P
3. 剥线长度 : 9-10mm
4. 使用温度范围 : -40°C~+120°C
5. “⊗”为重点管控尺寸
6. 未注公差表:

P距方向公差(mm)	其他尺寸公差(mm)						- ~ □
	8 ~ 16	16 ~ 24	≤6 ~ 30	6 ~ 30	30 ~ 90	90 ~ 200	
±0.08	±0.13	±0.18	±0.10	±0.20	±0.30	±0.50	±0.70
						0.05/10	≤
							±1°

## Ordering Information

JL2EDGKDH - 508 XX G 0 1

Pitch 508=5.08PH  
No.of pins 2P~24P  
Housing Color  
B=Black  
G=Green  
U=Blue  
R=Red  
V=White  
Y=Yellow  
D=Orange  
E=Grey  
Packing  
0=Pe bag  
A=Tray  
T=Tube

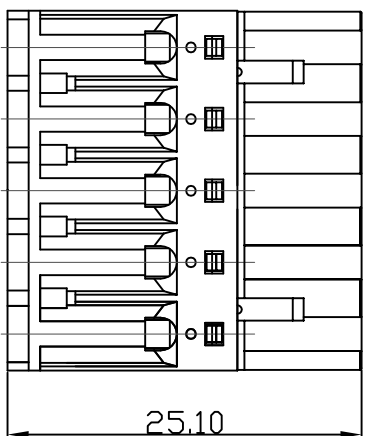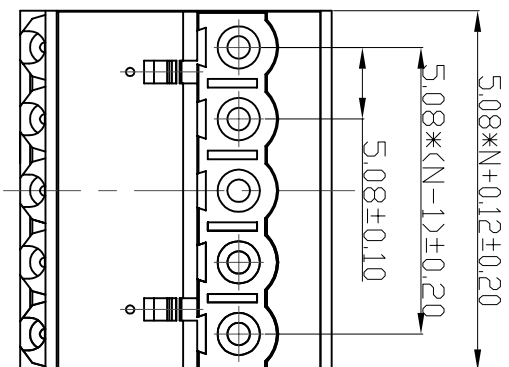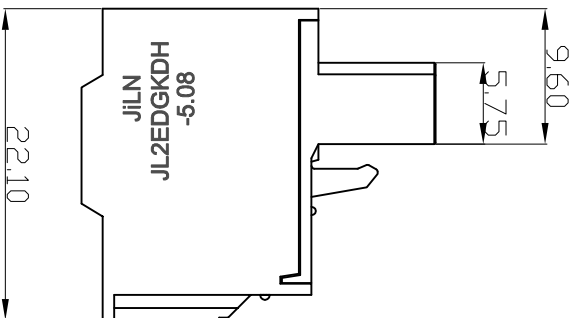

DRAW	LICHAO LIU		SCALE	FIT	<b>东莞市锦凌电子有限公司</b> DONGGUAN JINLING ELECTRONIC CO., LTD	
	CHECK	LICHAO LIU	UNIT	mm		
APPROVE	G. Y. L		SIZE	A4	PART NO.	JL2EDGKDH-508XXG01
			SHEET	1/1		
PRD.J			PROJ.			

